


Pushbutton Access and Release Devices

620 Series Heavy Duty Pushbuttons
631 Extreme Duty Pushbuttons



623 Pushbutton

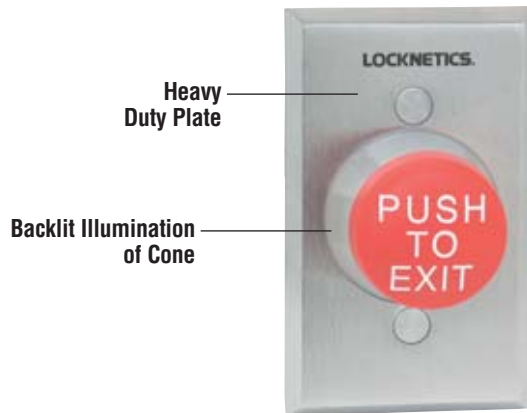

625 Pushbutton

Locknetics 620 and 631 Series Pushbuttons offer significant installer friendly innovations: screw terminal connections for the momentary action models, easy to install L2/ILL optional PC board offering backlit illumination for the cone with green and red LEDs for monitoring purposes. Additional options include: Delayed Action, Double Pole Double Throw, Heavy Duty Plate, and several architectural finishes. Alternate Action and Narrow Stile configurations are

available. The 620 Series Pushbuttons are available in three sizes: 1-1/4", 1-5/8" Mushroom and 2-3/4" Mushroom. New to the pushbutton color choices is the Glow-in-the-Dark (GID), which is offered across the line. There are two models of metal 1-1/4" button choices as well. The 620 Series replaces the 703, 704, 705 products and 600 Series Pushbuttons previously offered from Locknetics.

Benefits of Using Locknetics Pushbutton Access And Release Devices

- *Easy to install and operate*
- *Standard and narrow stile plates offer ultimate flexibility*
- *Multiple button configuration and finish options provide enhanced architectural appeal*

Pushbutton Access and Release Devices

620 Series Heavy Duty Pushbuttons
631 Extreme Duty Pushbuttons

Multiple Button Configuration Available

1-1/4" Button



621 Pushbutton
621-NS Pushbutton

1-5/8" Mushroom Button



623 Pushbutton
623-NS Pushbutton

2-3/4" Mushroom Button



625 Pushbutton HC
625-NS Pushbutton

1-1/4" Metal Button



631 Pushbutton
631-NS Pushbutton


	GID-EX	GID-H	GID	RD-EX	RD	GR-EX	GR	BL-H	BK
621 621 - NS									
623 623 - NS									
625 625 - NS									
621 621 - NS	AL-EX	AL							
631 631 - NS									

Pushbutton Access and Release Devices

620 Series Heavy Duty Pushbuttons
631 Extreme Duty Pushbuttons

Options

- DA** Delayed Action 0-60 seconds
- AA** Alternate Action/Maintained
- DP** Double Pole Double Throw
- L2/ILL** 3 LEDs -green/yellow/red concealed within opaque cone
- HDP** Heavy Duty Plate 1/4" thick Cast Zinc (Standard - 626 Satin Chrome Finish)

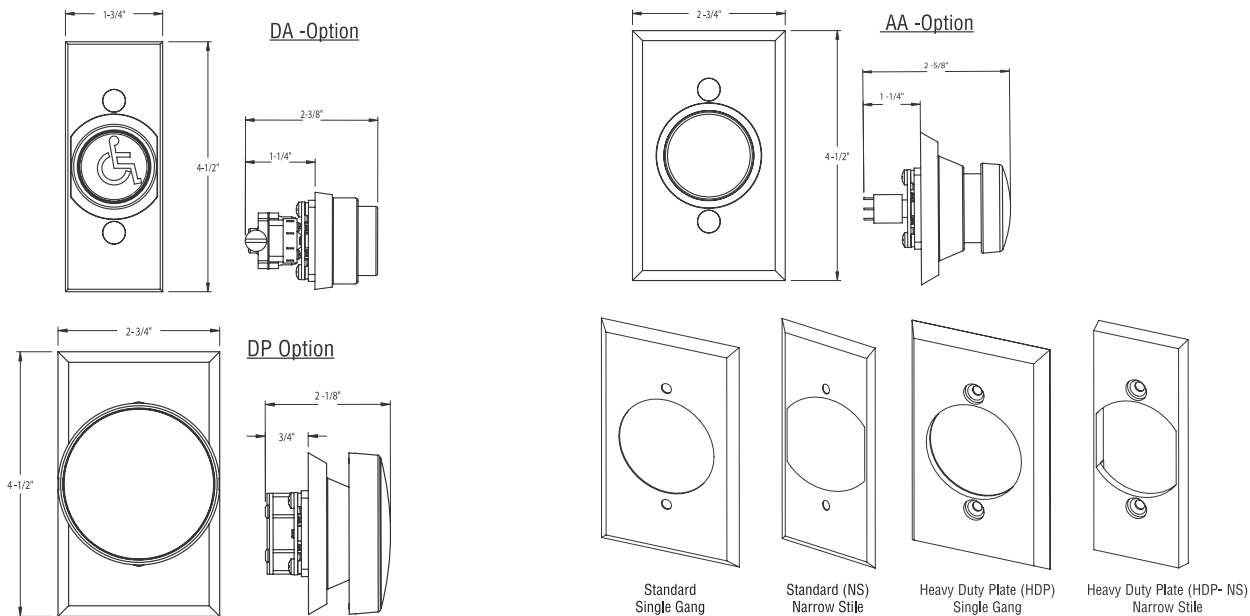

NOTE: Single pole (SPDT) standard dimensions featured above - DP Option.

Contact ratings with options:

- DP : 5 amp @ 250VAC, NO and NC contacts
- AA : 6 amp @ 125VAC, NO and NC contacts
- DA : 10 amp @ 250VAC, NO and NC contacts
- Red or Green LED's, 12 and 24 volts AC or DC

Momentary Action: standard 5 amp@250VAC

Cover Plate: Stainless steel (*standard*)

Heavy Duty plate 1/4" thick cast line cover plate with fasteners concealed by tamper resistant plugs. 626 Satin Chrome Standard finish.

Architectural Finishes



- SF-626
Satin
Chrome
(standard)
- SF-605
Bright
Brass
- SF-612
Satin
Bronze
- SF-613
Oil
Rubbed
Bronze
- SF-625
Bright
Chrome
- SF-1
White
Powder
Coat
- SF-2
Black
Powder
Coat

Push Button Access and Release Devices

620 Series Heavy Duty Pushbuttons

631 Series Extreme Duty Pushbuttons

How To Order Pushbutton Access and Release Devices

623 – GID-EX – DP – 626

Select Model

Select Button

Select Options

Select Finish

1. Select Model

621	1 1/4" Button, single gang
621-NS	1 1/4" Button Narrow Stile
623	1 5/8" Mushroom Button, single gang
623-NS	1 5/8" Mushroom Button Narrow Stile
625	2 3/4" Mushroom Button, single gang
625-NS	2 3/4" Mushroom Button Narrow Stile
631	1 1/4" Metal Button, single gang
631-NS	1 1/4" Metal Button Narrow Stile

2. Select Button

GID-EX	Glow-in-the-dark "PUSH TO EXIT"
GID-H	Glow-in-the-dark HANDICAPPED SYMBOL
GID	Glow-in-the-dark
RD-EX	Red, "PUSH TO EXIT"
RD	Red
GR-EX	Green, "PUSH TO EXIT"
GR	Green
BL-H	Blue, HANDICAPPED SYMBOL
BK	Black
AL-EX	Aluminum button, "PUSH TO EXIT"
AL	Aluminum button

3. Select Options

DA	Delayed Action
AA	Alternate Action Maintained
DP	Double Pole Double Throw (not available with DA option)
L2/ILL	3 LEDs -green/yellow/red concealed within opaque cone (not available for 625/625-NS models)
HDP	Heavy Duty Plate-1/4" thick Cast Zinc (standard - 626 Satin Chrome Finish)

5. Select Finish

SF-626	Satin Chrome (standard)
SF-605	Bright Brass
SF-612	Satin Bronze
SF-613	Oil Satin Bronze
SF-625	Bright Chrome
SF-1	White Powder Coat
SF-2	Black Powder Coat

Pushbutton Access and Release Devices

700 Series Pushbuttons



Locknetics by Schlage 700 Series Entry Level Pushbutton are designed to meet commercial applications. Use to egress swinging or sliding doors that are electrically or electronically locked. 700 Series Entry Level Pushbuttons are available for single gang and narrow stile applications. The 709 model, includes backlit buttons with "PUSH TO EXIT" or Handicap Symbol to meet ADA requirements.

Benefits of Using Locknetics Pushbutton Access and Release Devices

- *Standard stainless steel*
- *Momentary action (standard)*
- *7/8" red/black mushroom button*
- *2" square illuminated button*
- *Options include LEDs, alternate action - maintained (AA)*

Pushbutton Access and Release Devices

700 Series Pushbuttons

How To Order 700 Series Pushbutton Access and Release Devices

701RD – L2

Select Model
Select Options

1. Select Model

701RD	7/8" Red Mushroom Button
701BK	7/8" Black Mushroom Button
701RD EX	5/8" Red Button - Engraved "PUSH TO EXIT"
701RD EX ILL	5/8" Red Button - Illuminated "PUSH TO EXIT"
709RD EX ILL	2" Red Square - Illuminated "PUSH TO EXIT"
709GR EX ILL	2" Green Square - Illuminated "PUSH TO EXIT"
709BLH ILL	2" Blue Square - Illuminated Handicapped Symbol

2. Select Options

L2	Two LEDs, red and green, dual voltage
AA	Alternate Action – Maintained (not available for 709 models)
NS	Narrow Stile plate (not available for 709 models)

Specifications:

701 Pushbutton

Contact Ratings:	5 amps @ 250 VAC
Wire Leads:	20 awg – 6" long

709 Pushbutton

Contact Ratings:	10 amps @ 250 VAC
Wire Leads:	20 awg – 8" long

Input requirements with LED option

Voltage:	12/24 VAC/VDC
Current Draw:	30 mA
Wire Leads:	24 awg – 6" long

Input requirements with ILL option

Voltage:	12VDC for 709 series only 24VDC for 701/709 series
-----------------	---

Pushbutton Access and Release Devices

740 Series Emergency Break Glass Releases



740
Standard Break Glass
Assembly



741
Standard Break Glass
Assembly with LED
Indicator



742
Standard Break Glass
with Audible Alarm

Locknetics 740 Series Emergency Break Glass Releases are designed for use as emergency releases of non-designated egress doors such as in individual and partitioned laboratories, secluded testing areas, or other isolated work rooms that are purposely provided with exit doors. In perimeter protection systems that involve the central control of electric locking devices, an on-site emergency release may be required. The “break glass” concept may be preferred over the pull station, because it is less vulnerable to misuse or tamper actuation.

The 740 Series Emergency Break Glass units consist of a replacement Break glass cartridge, that normally holds the plunger-activated switch depressed, until the cartridge lens is broken. When the lens is broken the plunger moves forward and alters the switch contact position. Four replacement lens disks are provided with each assembly. The small hammer is attached to the Break Glass Assembly via a mounting clip along with a 12" chain, to insure it will not detach from the assembly.

Benefits of Using Locknetics 740 Series Emergency Break Glass Releases

- Surface mount in a standard 3-gang enclosure
- Compatible with all Fail Safe type electronic locking systems
- An effective alternative to the standard pull box
- Stainless steel standard finish
- Models with LED or audible alarm
- Clearly marked signage indicating purpose of the release

Pushbutton Access and Release Devices

740 Series Emergency Break Glass Releases

How To Order 740 Series Emergency Break Glass Releases

1. Select Model

- 740** Includes break glass switch assembly and hammer mounted to a silk-screened 3-gang stainless switch plate

- 741** Includes an attached indicator light with red lens

- 742** Includes a Sonalert horn for 6-24VDC operation attached to the plate

Specifications:

Contact Box Form "Z" switch
Contact rating: 6A @ 120 VAC
Normally Open (NO)
Normally Closed (NC) contacts with color-coded leads

LED: 12/24 VDC
Horn: 3-18 mA
Input: 6-28 VDC
Decibels: 80 dB @ 2ft.

660 Series Mini Station Control



660-PB

The 660 Series Mini Station Control is designed for concealed desk application. Used to release an electric or electronic locking mechanism from a remote location. The 660 Series Mini Station Control is mounted in a mini aluminum box, 2" x 2" x 1". The 660 is available with a momentary action pushbutton or maintained action toggle switch. Both can be surface mounted. A typical application is under a desk to release an entrance door.

Benefits of Using 660 Series Mini Station Control

- *Surface mount application*
- *Choice of maintained or momentary action*
- *Compact size*
- *Recommended for concealed desk application*

How To Order 660 Series Mini Station Control

1. Select Model

- | | |
|---------------|---------------------------|
| 660-T4 | SPDT Maintained Toggle |
| 660-PB | DPDT Momentary Pushbutton |

Specifications:

- Switch contact rating:** 1.5amp @ 28 VAC/VDC
Length: 2"
Width: 2"
Height: 1"