

MODEL 354

Application

Double Acting, Non-handed
Maximum weight: 75 lbs.
Dwarf doors from 2'2" to 3'0" wide
(660 x 914mm)




ANSI/CO9503
Shipping wt. 6 lbs.

Product Description & Features

- Surface mounted top pivot: 3541020
- Recommended for office rail gates, partitions, and lavatory stall doors
- 1-3/4" door thickness
- Maximum opening 90°
- Arm adjustment. Door normally comes to rest at closed position. If door is to remain open, arm is set on spindle so door comes to rest at 90°
- Package also includes closer bracket and flange style arm
- Carry full weight of door when pivotal hung
- Quiet control; no slamming or flapping
- All moving parts enclosed and fully immersed in lubricating checking fluid
- Painted finishes only

Technical Information

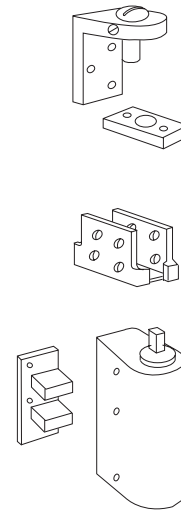

MODEL 355

Application


Double Acting, Non-handed

ANSI/CO9503
Shipping wt. 6 lbs.


Product Description & Features

- Identical to 354 except:
- Mortise top pivot: 3551020

[\(Click here to view template\)](#)

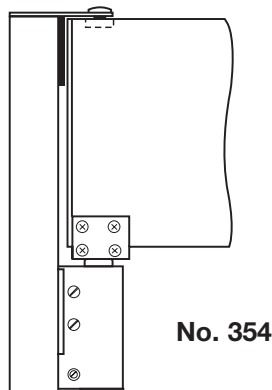

[\(Click here to view template\)](#)

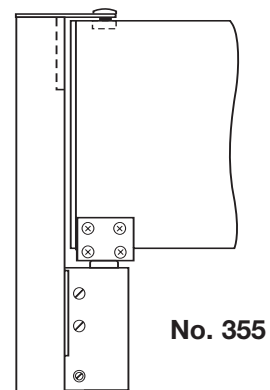

MODEL 356

Application


Double Acting, Non-handed
 Maximum weight: 75 lbs.
 Dwarf doors from 2'2" to 3'0" wide
 (660 x 914mm)



Product Description & Features

- Surface mounted top pivot: 3541020
- Recommended for office rail gates, partitions, and lavatory stall doors
- 1-3/4" door thickness
- Arm can be adjusted so that door stands ajar at any degree
- Package also includes closer bracket and arm that may be surface mounted or mortised
- Maximum opening 90°
- Carry full weight of door when pivotal hung
- Quiet control; no slamming or flapping
- All moving parts enclosed and fully immersed in lubricating checking fluid
- Painted finishes only

Technical Information



ANSI/CO9503
 Shipping wt. 6 lbs.


MODEL 357

Application

Double Acting, Non-handed


Product Description & Features

- Identical to 356 except:
- Mortise top pivot: 3551020




ANSI/CO9503
 Shipping wt. 6 lbs.

[\(Click here to view template\)](#)

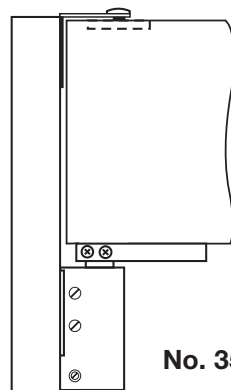

No. 356

[\(Click here to view template\)](#)

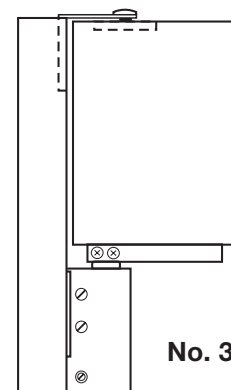

No. 357

MODEL 359

Application


Single Acting, Non-handed
 Maximum weight: 75 lbs.
 Dwarf doors from 2'2" to 3'0" wide
 (660 x 914mm)



Product Description & Features


- Recommended for office rail gates, partitions, and lavatory stall doors
- 1-3/4" door thickness
- Maximum opening 140°
- Surface mounted to edge of partition with edge wide enough for 1-1/2" bracket
- Door hanging means by others
- Track style arm
- Package includes closer, bracket, and slide track arm

Technical Information

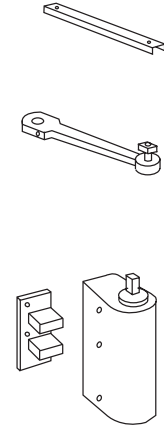


ANSI/C06071
 Shipping wt. 5-1/2 lbs.

[\(Click here to view template\)](#)

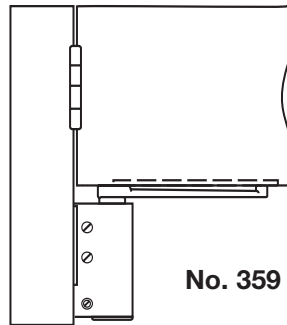


MODEL 354

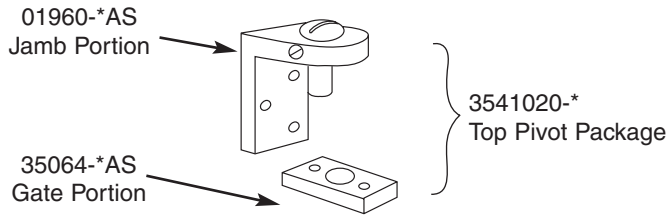


Top Pivot Screw Kit
107017 -*
Closer Mtg. Screw Kit
107350

* specify finish

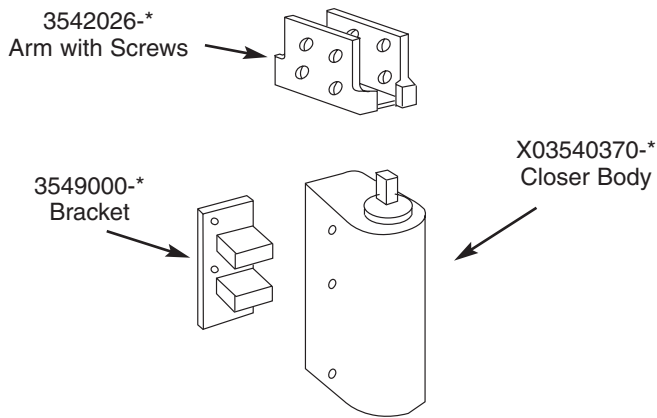


MODEL 355

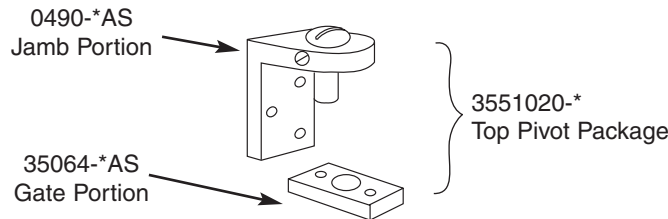


Top Pivot Screw Kit
107017 -*
Closer Mtg. Screw Kit
107350

* specify finish

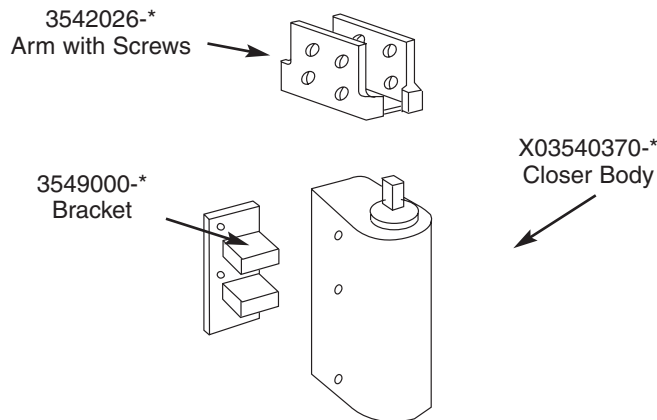

MODEL 356

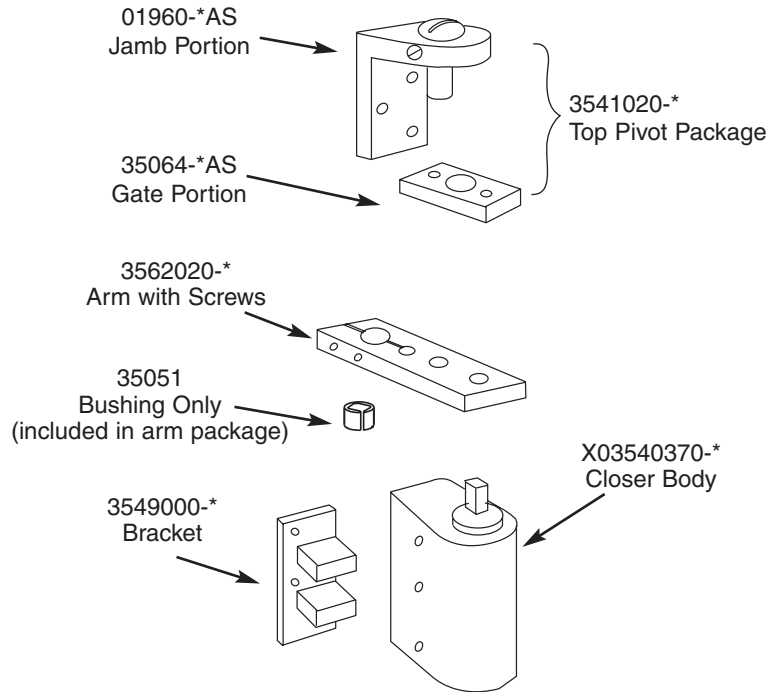


*Top Pivot Screw Kit
107017 - **

*Arm Screw Kit
107359*

*Closer Mtg. Screw Kit
107350*

** specify finish*

MODEL 357

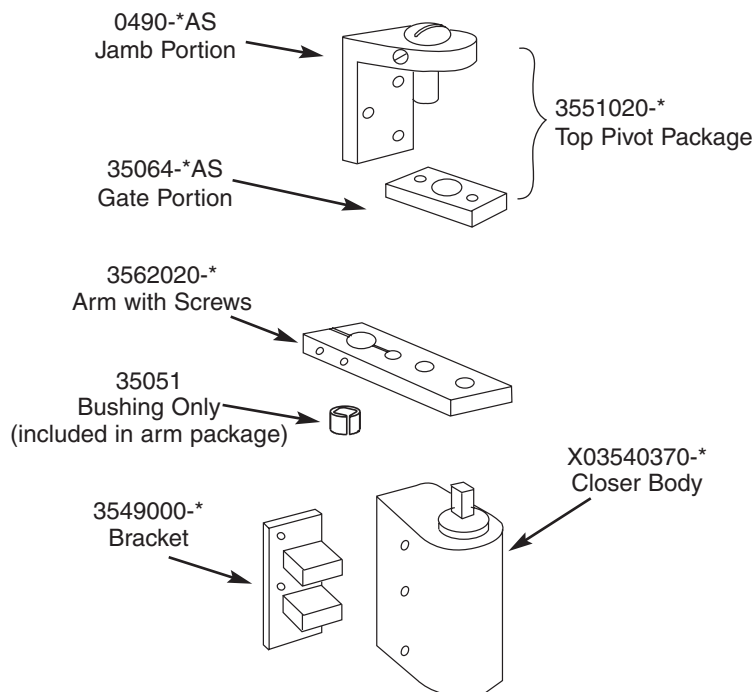


*Top Pivot Screw Kit
107017 - **

*Arm Screw Kit
107359*

*Closer Mtg. Screw Kit
107350*

** specify finish
sprayed finishes only*

MODEL 359

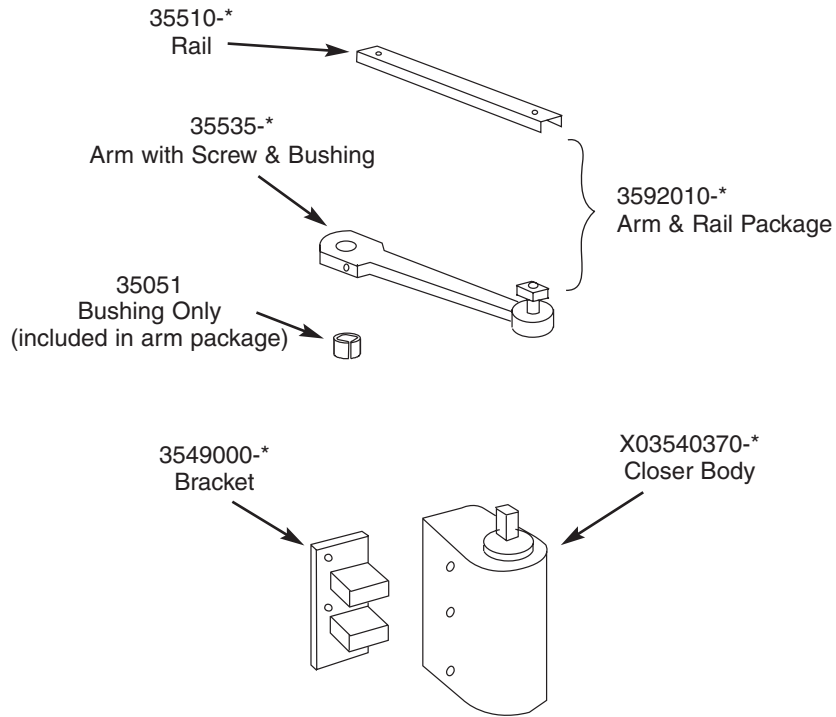

Arm Screw Kit
107003

Closer Mtg. Screw Kit
107350

* specify finish